



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>G06F 17/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/11567</b> (43) International Publication Date: 02 March 2000 (02.03.2000)
--	-----------	--

<p>(21) International Application Number: PCT/US98/17365</p> <p>(22) International Filing Date: 21 August 1998 (21.08.1998)</p> <p>(60) Parent Application or Grant</p> <p>VISTO CORPORATION [/]; (). MENDEZ, Daniel, J. [/]; (). RIGGINS, Mark, D. [/]; (). WAGLE, Prasad [/]; (). YING, Christine, C. [/]; (). SOCKOL, Marc, A. ; ().</p>	<p>Published</p>
---	------------------

(54) Title: SYSTEM AND METHOD FOR USING A GLOBAL TRANSLATOR TO SYNCHRONIZE WORKSPACE ELEMENTS ACROSS A NETWORK

(54) Titre: SYSTEME ET PROCEDE D'UTILISATION D'UN TRADUCTEUR GLOBAL POUR SYNCHRONISER DES ELEMENTS D'UNE ZONE DE MANOEUVRE A TRAVERS UN RESEAU

## (57) Abstract

A system (100) uses a global translator (122) to automatically synchronize multiple copies of a workspace element across different format between multiple sites in a secure network environment, independent of whether the sites are protected by site firewalls (114). The secure network environment includes a global server (106) connected to multiple clients. The system includes a first store (136) for storing a first workspace element in a first format, a second store (154) for storing a workspace in a second format, a communication channel (108) coupling the first store to the second store, and a translator (122) for translating between a first format and second format.

## (57) Abrégé

Un système (100) utilise un traducteur global (122) pour synchroniser automatiquement des copies multiples d'un élément de zone de manoeuvre de largeurs de format différentes entre des sites multiples dans un environnement de réseau sûr, indépendamment du fait que les sites soient protégés par des murs coupe-feu (114) du site. L'environnement de réseau sûr comprend un serveur global (106) connecté à des clients multiples. Le système comprend une première mémoire (136) pour la mémorisation d'un premier élément d'une zone de manoeuvre dans un premier format, une deuxième mémoire (154) pour la mémorisation d'une zone de manoeuvre dans un deuxième format, un canal de communication (108) reliant la première mémoire à la deuxième mémoire, et un traducteur (122) assurant la traduction entre un premier format et un deuxième format.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>G06F 17/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/11567</b> (43) International Publication Date: <b>2 March 2000 (02.03.00)</b>
(21) International Application Number: <b>PCT/US98/17365</b> (22) International Filing Date: <b>21 August 1998 (21.08.98)</b> (71) Applicant: <b>VISTO CORPORATION [US/US]; 1937 Landings Drive, Mountain View, CA 94043 (US).</b> (72) Inventors: <b>MENDEZ, Daniel, J.; 801 Church Street #1121, Mountain View, CA 94041 (US). RIGGINS, Mark, D.; 5818 Moraga Avenue, San Jose, CA 95123 (US). WAGLE, Prasad; 2831 Pruneridge Avenue, Santa Clara, CA 95051 (US). YING, Christine, C.; 1204 Moonsail Lane, Foster City, CA 94404 (US).</b> (74) Agents: <b>SOCKOL, Marc, A. et al.; Graham &amp; James LLP, 600 Hansen Way, Palo Alto, CA 94304 (US).</b>		(81) Designated States: <b>CA, CN, IL, JP, SG, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  <b>Published</b> <i>With international search report.</i>

(54) Title: **SYSTEM AND METHOD FOR USING A GLOBAL TRANSLATOR TO SYNCHRONIZE WORKSPACE ELEMENTS ACROSS A NETWORK**

(57) Abstract

A system (100) uses a global translator (122) to automatically synchronize multiple copies of a workspace element across different format between multiple sites in a secure network environment, independent of whether the sites are protected by site firewalls (114). The secure network environment includes a global server (112) connected to multiple clients. The system includes a first store (136) for storing a first workspace element in a first format, a second store (154) for storing a workspace in a second format, a communication channel (108) coupling the first store to the second store, and a translator (122) for translating between a first format and second format.

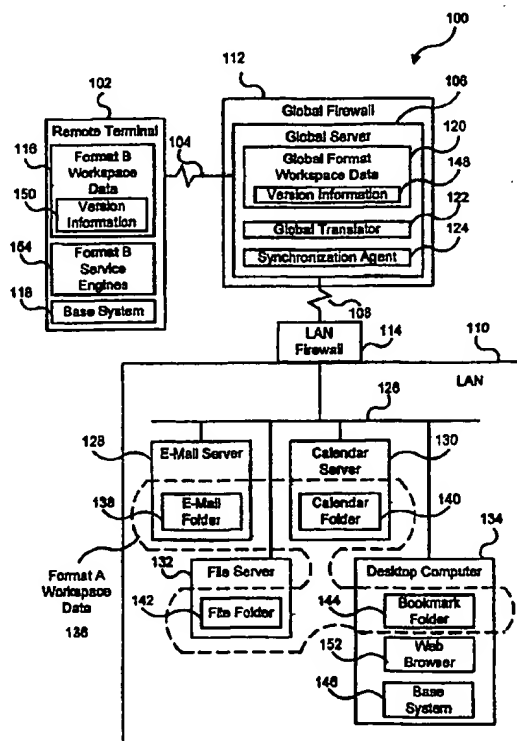

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

5

10

15

**This Page Blank (uspto)**

20

25

30

35

40

45

50

55

5                    SYSTEM AND METHOD FOR USING A GLOBAL TRANSLATOR TO SYNCHRONIZE  
                         WORKSPACE ELEMENTS ACROSS A NETWORK

10                    BACKGROUND OF THE INVENTION

1.     Field of the Invention

                 This invention relates generally to computer networks, and more particularly to a  
15               system and method for using a global translator to synchronize workspace elements such as  
                 files across a computer network.

2.     Description of the Background Art

20               Data consistency is a significant concern for computer users. For example, when  
                 maintaining multiple independently-modifiable copies of a document, a user risks using an  
                 outdated version. By the time the user notices an inconsistency, interparty  
25               miscommunication or data loss may have already resulted. The user must then spend more  
                 time attempting to reconcile the inconsistent versions and addressing any  
                 miscommunications.

30               The problem of data inconsistency is exacerbated when multiple copies of a document  
                 are maintained at different network locations. For example, due to network security systems  
                 such as conventional firewall technology, a user may have access only to a particular one of  
35               these network locations. Without access to the other sites, the user cannot confirm that the  
                 version on the accessible site is the most recent draft.

40               Data consistency problems may also arise when using application programs from  
                 different vendors. For example, the Netscape Navigator™ web browser and the Internet  
                 Explorer™ web browser each store bookmarks for quick reference to interesting web sites.  
                 However, since each web browser uses different formats and stores bookmarks in different  
45               files, the bookmarks are not interchangeable. In addition, one web browser may store a  
                 needed bookmark, and the other may not. A user who, for example, runs the Internet  
                 Explorer™ web browser at home and runs the Netscape Navigator™ web browser at work  
50               risks having inconsistent bookmarks at each location.

5

Therefore, a system and method are needed for providing users with data consistency, and more particularly for synchronizing multiple copies of a workspace element such as a document across a computer network.

10

/s.s.

15

20

25

30

35

40

45

50

55

5

SUMMARY OF THE INVENTION

10

15

The present invention provides a system and method for using a global translator to synchronize multiple copies of a workspace element in a secure network environment. The secure network environment includes a global server connected to multiple clients. Using the present system and method, the clients automatically synchronize workspace elements between multiple sites, independent of whether the sites are protected by site firewalls. Using the present system and method, the clients can automatically synchronize workspace elements across different formats and can merge workspace element folders for cross use.

20

25

The system includes a first store for storing first workspace elements in a first format, a second store for storing second workspace elements in a second format, a communications channel coupling the first store to the second store, synchronization means for synchronizing first workspace elements and second workspace elements, and a translator for translating between the first format and the second format.

30

Similarly, the method includes the steps of accessing a first store storing a first workspace element in a first format, accessing a second store storing a second workspace element in a second format, synchronizing the first workspace element and the second workspace element, and translating between the first format and the second format.

35

40

45

50

The system and method advantageously use a trusted third party to enable the synchronization of workspace data among multiple sites. Accordingly, a client user who maintains a work site, a home site, an off-site and the global server site can synchronize the workspace data or portions thereof among all four sites. Further, the predetermined criteria (which control when the synchronization-start module initiates synchronization) may be set so that the general synchronization module synchronizes the workspace data upon user request, at predetermined times during the day such as while the user is commuting, or after a predetermined user action such as user log-off or user log-on. Because the system and method operate over the Internet, synchronization can occur over any distance. Since the system and method include format translation, merging of workspace elements between different application programs and different platforms is possible. Further, because

55

5                   synchronization is initiated from within the firewall, the typical firewall which prevents in-bound communications does not act as an impediment to workspace element synchronization. Also, since the user's preferences may be previously set, the present system and method may  
10                   operate unattended by the client user.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15                   FIG. 1 is a block diagram illustrating a computer network in accordance with the present invention;

                  FIG. 2 is a block diagram illustrating details of a FIG. 1 service server;

                  FIG. 3 is a block diagram illustrating details of the FIG. 1 desktop computer;

20                   FIG. 4 is a block diagram illustrating details of a FIG. 1 base system;

                  FIG. 5 is a block diagram illustrating details of the FIG. 1 synchronization agent;

                  FIG. 6 is a graphical representation of an example bookmark in the global format; and

25                   FIG. 7 is a flowchart illustrating a method for synchronizing multiple copies of a workspace element in a secure network.



DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 is a block diagram illustrating a computer network 100, comprising a first node such as a remote computer terminal 102 coupled via a communications channel 104 such as the Internet to a global server 106. The global server 106 is in turn coupled via a communications channel 108 such as the Internet to a second node such as a Local Area Network (LAN) 110. The global server 106 is protected by a global firewall 112, and the LAN 110 is protected by a LAN firewall 114.

The LAN 110 includes a system bus 126 coupling the LAN firewall 114 to an e-mail server 128 having an e-mail folder 138 containing e-mails, to a file server 132 having a file folder 142 containing files, to a calendar server 130 having a calendar folder 140 containing calendar data, and to a desktop computer 134 having a web browser 152 and a bookmark folder 144 containing bookmarks. It will be appreciated that the e-mail folder 138, file folder 142, calendar folder 140 and bookmark folder 144 or portions thereof may be stored at different locations such as on the desktop computer 134. The e-mail folder 138, file folder 142, calendar folder 140 and bookmark folder 144 are exemplary, grouped by like information and are collectively referred to herein as "workspace data" 136. Those skilled in the art will recognize that the workspace data 136 may include other types of data such as an application program such as Microsoft Word 6.0.1 and the documents created using them. It will be further appreciated that the e-mail folder 138, file folder 142, calendar folder 140 and bookmark folder 144 may each be divided into workspace elements, wherein each workspace element folder or each workspace element individually is identified by particular version information 255 (described below with reference to FIG. 2). Accordingly, each e-mail or e-mail folder, file or file folder, calendar or calendar folder, bookmark or bookmark folder, document or document folder, etc. may be referred to as "a workspace element."

Each workspace element of workspace data 136 in LAN 110 is maintained in a predetermined format, referred to as Format A, which is based on the service engine 245 (FIG. 2) that created it. For example, the web browser 152 on the desktop computer 134 may be the Netscape Navigator™ web browser, and the bookmarks in the bookmark folder 144

5 created thereby are maintained in Format A. Although Format A is being described as a  
single format, one skilled in the art knows that Format A actually includes a format for each  
information type, e.g., there will be a Format A for bookmarks, a Format A for files, a Format  
10 A for calendar data, a Format A for e-mails, etc.

The remote terminal 102 stores service engines 154 for maintaining workspace data  
116, which may include information common with information in the workspace data 136.  
15 The workspace data 116 is maintained in a format, referred to as Format B, which may be  
different from Format A. Format B is also based on the service engines 154 that create the  
workspace elements. For example, if one of the service engines 154 is the Internet  
20 Explorer™ web browser (not shown), then the bookmarks (not shown) created therewith are  
maintained in Format B. Although Format B is being described as a single format, one  
skilled in the art knows that Format B actually includes a format for each information type.  
25 Further, the workspace data 116 also includes version information 150 similar to version  
information 255 described below with reference to FIG. 2.

It will be appreciated that remote terminal 102 may include a smart telephone, a  
30 Personal Data Assistant (PDA) such as the PalmPilot system by the U.S. Robotics, Inc., a  
laptop computer, etc. As a smart telephone, the workspace data 116 may include telephone  
numbers and e-mails. As a PDA, the workspace data 116 may include addresses, calendar  
35 data and e-mails. As a laptop computer, the workspace data 116 may include the same types  
of information as workspace data 136.

The global server 106 acts as a third party administrator. The global server 106 stores  
40 independently-modifiable copies of selected portions of the workspace data 136 and 116,  
collectively referred to herein as workspace data 120. Accordingly, the workspace data 120  
includes an independently-modifiable copy of each workspace element in the selected  
45 portions of the workspace data 136 and 116 and an independently-modifiable copy of each  
corresponding version information 255 (FIG. 2) and 150. The version information copies are  
collectively referred to herein as version information 148, and are also described with  
50 reference to FIG. 2.

5           The global server 106 maintains the workspace data 120 in a format, referred to as a  
"global format," which is selected to be easily translatable by the global translator 122 to and  
from Format A and to and from Format B. Although the global format is being described as a  
10       single format, one skilled in the art knows that the global format actually includes a global  
format for each information type, e.g., there will be a global format for bookmarks, a global  
format for files, a global format for calendar data, a global format for e-mails, etc. An  
15       example bookmark workspace element in the global format is described in detail below with  
reference to FIG. 6.

          Network 100 further comprises synchronization means, which includes a base system  
20       146 stored within the LAN 110 and for example on the desktop computer 134. Network 100  
further includes a synchronization agent 124 stored outside the LAN firewall 114 and  
preferably on the global server 106. The base system 146 and the synchronization agent 124  
25       cooperate to synchronize selected portions of the workspace data 136 with selected portions  
of the workspace data 120. The synchronization means may synchronize workspace elements  
individually, e.g., specific word processor documents, or may synchronize workspace element  
30       folders, e.g., a bookmark folder. Generally, the base system 146 manages the selected portion  
of the workspace data 136 within the LAN 110 and the synchronization agent 124 manages  
the selected portions of the workspace data 120 within the global server 106. It will be  
35       appreciated that the global translator 122 cooperates with the synchronization means to  
translate data formats to and from the global format. As described in greater detail below  
with reference to FIG. 4, the base system 190 preferably initiates and controls data  
40       synchronization.

          The synchronization means may also include, stored on the remote terminal 102, a  
base system 118 which operates in a similar manner to the base system 146. The base system  
45       118 on the remote terminal 102 cooperates with the synchronization agent 124 to synchronize  
selected portions of the workspace data 116 with selected portions of the workspace data 120.  
As described in greater detail below with reference to FIG. 4, the base system 118 on the  
50       remote terminal 102 also preferably initiates and controls data synchronization with the

5 global server 106. Also, note that the distribution of labor between the base system 118 in the remote terminal 102 and the synchronization agent 124 in the global server 106 may vary. Sometimes, primarily when the remote terminal 102 is a relatively less computationally  
10 powerful device (such as a smart phone or a PDA), most of the actual computationally-intensive work will occur within the synchronization agent 124 in the global server 106. In other situations, for example, when the remote terminal 102 is a fully configured PC, most of  
15 the computationally-intensive work will occur locally on the base system 118 in the remote terminal 102.

Accordingly, the synchronization means independently synchronizes the selected  
20 portions of workspace data 116 and 136 with the selected portions of the workspace data 120. Thus, the synchronization means indirectly synchronizes workspace data 136 with workspace data 116.

25 FIG. 2 is a block diagram illustrating details of a service server 200, wherein each of the e-mail server 145, the file server 150, the calendar server 155 and the desktop computer 160 is an instance thereof. Service server 200 includes a Central Processing Unit (CPU) 205  
30 such as an Intel Pentium® microprocessor or a Motorola Power PC® microprocessor. An input device 210 such as a keyboard and mouse and an output device 215 such as a Cathode Ray Tube (CRT) display are coupled via a signal bus 220 to CPU 205. A communications  
35 interface 225 (such as an Ethernet port), a data storage device 230 (such as a magnetic disk), and Random-Access Memory (RAM) 235 are further coupled via signal bus 220 to the CPU 205.

40 An operating system 240 includes a program for controlling processing by the CPU 205, and is typically stored in the data storage device 230 and loaded into the RAM 235 for execution. A service engine 245 includes a program for performing a particular service such  
45 as maintaining an e-mail data base, a file data base, a calendar data base or a bookmarks data base. The service engine 245 may also be stored in the data storage device 230 and loaded into the RAM 235 for execution.  
50

5 To perform a service, the service engine 245 creates service data 250 (e.g., an e-mail  
or an e-mail folder 138 containing e-mails, a file or a file folder 142 containing files, calendar  
data or a calendar folder 140 containing calendar data, a bookmark or a bookmark folder 144  
10 containing bookmarks, etc.) in Format A according to predetermined protocols. The service  
engine 245 stores the data 250 in the data storage device 250. The service data 250 includes  
version information 255 indicating the date and time of the last modification and the status as  
15 of the last interaction with the global server 106.

For example, if service data 250 is created and selected to be merged with global  
server workspace data 120, then the version information 255 for the service data 250 may  
20 include the date of last modification and a null set indicating the status as of the last  
interaction with the global server 106. From the version information 255, the base system  
146 determines that the service data 250 in its entirety has not been merged with the global  
server workspace data 120. Similarly, if the service data 255 included elements 1, 2 and 3 as  
25 of the last modification, then the previous status as of the last interaction will indicate that the  
service data 255 included elements 1, 2 and 3. If the service data 255 currently includes  
elements 2, 3 and 4, then the base system 140 will determine that, since last synchronization,  
30 element 1 has been deleted and element 4 has been added.

It will be appreciated that the version information 148 on the global server 106  
35 includes information similar to version information 255. That is, the version information 148  
will include information indicating the date and time the version was last modified and the  
status as of the last interaction with each client. The service engine 245 operates to update  
40 the version information 255 after modifications are made and after synchronization occurs.

FIG. 3 is a block diagram illustrating details of the desktop computer 160, which  
45 includes a CPU 305, an input device 310, an output device 315, a communications interface  
325, a data storage device 330 and RAM 335, each coupled to a signal bus 320.

An operating system 340 includes a program for controlling processing by the CPU  
50 305, and is typically stored in the data storage device 330 and loaded into the RAM 335 for

5 execution. A web browser 152 (i.e., a particular service engine 245, FIG. 2) includes a  
Format A service program for managing bookmark folder 144 (i.e., particular service data  
250, FIG. 2) which includes version information 350 (i.e., particular version information 255,  
10 FIG. 2). The web browser 152 may be also stored in the data storage device 330 and loaded  
into the RAM 335 for execution. The bookmark folder 144 may be stored in the data storage  
device 330. As stated above with reference to FIG. 1, the base system 146 operates to  
15 synchronize the workspace data 136 (which includes the bookmark folder 144) with the  
workspace data 120. The base system 146 may be also stored in the data storage device 330  
and loaded into the RAM 335 for execution.

20 FIG. 4 is a block diagram illustrating details of the base system 400, which  
exemplifies base systems 146 and 118. Base system 400 includes a communications module  
405, a user interface module 410, locator modules 415, a synchronization-start ("synch-start")  
25 module 420, a general synchronization module 425 and a content-based synchronization  
module 430. For simplicity, each module is illustrated as communicating with one another  
via a signal bus 440.

30 The communications module 405 includes routines for compressing data and routines  
for communicating via the communications interface 325 (FIG. 3) with the synchronization  
agent 124 (FIG. 1). The communications module 405 may further include routines for  
35 applying Secure Socket Layer (SSL) technology and user identification and authentication  
techniques (i.e., digital certificates) to establish a secure communication channel through the  
global firewall 112. Examples of communications modules 405 may include TCP/IP stacks  
40 or the AppleTalk® protocol.

45 The user interface module 410 includes routines for communicating with a user, and  
may include a conventional Graphical User Interface (GUI). The user interface module 410  
cooperates with the other system components as described herein.

50 The locator modules 415 include routines for identifying the memory locations of the  
workspace elements in the workspace data 136 or 116 and in the workspace data 120.

5           Workspace element memory location identification may be implemented using intelligent  
software, i.e., preset memory addresses or the system's registry, or using dialogue boxes to  
query a user. More particularly, the locator modules 415 in the base system 146 determine  
10           the memory addresses of the e-mail folder 138, the file folder 142, the calendar folder 140  
and the bookmark folder 144 and the memory addresses of the workspace elements therein.  
The locator modules 415 also determine the corresponding memory addresses of the  
15           corresponding folders in the workspace data 120 and the corresponding workspace elements  
therein. Similarly, the locator modules 415 in the base system 118 determine the memory  
locations of the workspace elements of workspace data 116 and the memory locations of the  
20           corresponding workspace elements in the workspace data 120.

          It will be appreciated that the locator modules 415 may include locator modules 415  
specifically dedicated to each folder or workspace data type. That is, the locator modules 415  
25           may include a locator module 415 dedicated to locating bookmarks, a locator module 415  
dedicated to locating e-mails, a locator module 415 dedicated to locating files, a locator  
module 415 dedicated to locating calendar appointments, etc. It will be further appreciated  
30           that the locator modules 415 may perform workspace element memory location identification  
upon system boot-up or after each communication with the global server 120 to maintain  
updated memory addresses of workspace elements.

          The synchronization-start module 420 includes routines for determining when to  
35           initiate synchronization of workspace data 136 or 116 with workspace data 120. For  
example, the synchronization-start module 420 may initiate data synchronization upon user  
request, at a particular time of day, after a predetermined time period passes, after a  
40           predetermined number of changes, after a user action such as user log-off or upon like  
criteria. The synchronization-start module 420 initiates data synchronization by instructing  
the general synchronization module 425 (described below) to begin execution of its routines.  
45           It will be appreciated that communication with the synchronization agent 124 preferably  
initiates from within the LAN 110, because the typical firewall 114 prevents in-bound  
communications and allows out-bound communications.  
50

5           The general synchronization module 425 includes routines for receiving version  
information 148 for modified versions from the synchronization agent 124 (FIG. 1), and  
routines for examining the version information 255 or 150 against a last synchronization  
10       signature 435 (such as a last synchronization date and time) to determine which versions have  
been modified. The general synchronization module 425 further includes routines for  
examining the version information 148 and the version information 255 or 150 to determine  
15       if one or both versions of a particular workspace element or workspace element folder have  
been modified.

          Further, the general synchronization module 425 includes routines for performing an  
20       appropriate synchronizing responsive action. Appropriate synchronizing responsive actions  
may include, if only one version of a workspace element in workspace data 136 or 116 has  
been modified, then forwarding the modified version (as the preferred version) to the other  
25       store(s) or determining and forwarding only the changes made. Computing the changes made  
may be performed by examining the current status against the previous status as of the last  
synchronization or by comparing the two versions. It will be appreciated that no content-  
30       based review of the changes is needed. It will be appreciated that one store preferably  
forwards only the changes to the other store for optimizing use of processor power and  
minimizing the data communications across the communications channel 108 or 104.

          Other appropriate synchronizing responsive actions may include, if two versions of a  
35       workspace element have been modified independently, then instructing the content-based  
synchronization module 430 (described below) to execute its routines. That is, if two  
versions of the same workspace element have been modified independently, then a content-  
40       based review of the changes is preferable. Upon completion of the data synchronization, the  
general synchronization module 425 updates the last synchronization signature 435.

          The content-based synchronization module 430 includes routines for reconciling two  
45       or more modified versions of a workspace element. For example, if a user has independently  
modified the original and the copy of a workspace element since the last synchronization,  
50       then the content-based synchronization module 430 determines an appropriate responsive



5 action. The content-based synchronization module 430 may request the user to select a preferred one of the modified versions or may respond based on preset preferences, i.e., by  
10 storing both versions in both stores or preferably by integrating the modified versions into a single preferred version which replaces each modified version at both stores.

The content-based synchronization module 430 examines the changes made to each  
15 version and determines if conflicts exist. When implementing version integration, a conflict may arise if inconsistent modifications such as deleting a paragraph in one version and modifying the same paragraph in the other version have been made. If a conflict exists, then  
20 the content-based synchronization module 430 attempts to reconcile the conflict, e.g., by requesting user selection or by storing both versions at both stores. Otherwise, if no conflict exists, then the content-based synchronization module 430 integrates the changes to each of the versions and updates the version information 148, 150 or 255 accordingly.

25 FIG. 5 is a block diagram illustrating details of the synchronization agent 124, which includes a communications module 505 (similar to the communications module 405 described above with reference to FIG. 4) and a general synchronization module 515 (similar  
30 to the general synchronization module 425 described above also with reference to FIG. 4).

The communications module 505 includes routines for compressing data, and routines  
35 for communicating via the communications channel 108 with the base system 146 or via the communications channel 104 with the base system 118. The communications module 505 may further include routines for establishing a secure communications channel through the  
40 global firewall 112 and through the LAN firewall 114 with the communications module 405.

Similar to the general synchronization module 425, the general synchronization  
45 module 515 includes routines for examining the version information 148 and the last synchronization signature 435 (FIG. 4) to determine which versions have been modified and the changes made. It will be appreciated that the general synchronization module 515 may maintain its own last synchronization signature 435 copy (not shown) or may request the last  
50 synchronization signature 435 from the base system 146 or 118. The general synchronization

5 module 515 further includes routines for forwarding workspace data 120 determined to be modified to the general synchronization module 425, and routines for receiving preferred  
10 versions of workspace elements of workspace data 136 or 116 or just the changes from the general synchronization module 425.

15 FIG. 6 illustrates an example bookmark workspace element in the global format. The global translator 122 incorporates all the information needed by both formats (Format A and Format B) to create the Global Format. For example, if a bookmark in Format A needs  
20 elements X, Y and Z and a bookmark in Format B needs elements W, X and Y, the global translator 122 incorporates elements W, X, Y and Z to create a bookmark in the Global Format. Further, the global translator 122 incorporates the information which is needed by the synchronization means such as the last modified date. Accordingly, a bookmark in the  
25 Global Format includes a user identification (ID) 605, an entry ID 610, a parent ID 615, a folder ID flag 620, a name 625, a description 630, the Uniform Resource Locator (URL) 635, the position 640, a deleted ID flag 645, a last modified date 650, a created date 655 and a separation ID flag 660.  
30

35 FIG. 7 is a flowchart illustrating a method 700 for using a global translator 122 to synchronize multiple copies of a workspace element in a secure network 100. Method 700 begins with the user interface module 410 in step 705 enabling a user to select workspace  
40 elements of workspace data 136 and 118 for the synchronization means to synchronize. The locator modules 415 in step 710 identify the memory locations of the workspace elements in workspace data 136 and 116 and the corresponding memory locations in workspace data 120. If a selected workspace element does not have a corresponding memory location, such as in  
45 the case of adding a new workspace elements to the global server 106, then one is selected. The selected memory location may be a preexisting workspace element or a new workspace element. As stated above, workspace element memory location identification may be  
50 implemented using intelligent software or dialogue boxes. The general synchronization

5 module 425 and general synchronization module 515 in step 715 set the previous status of the workspace elements equal to the null set. Setting the previous status to the null set indicates that all information of the workspace element has been added.

10 The synchronization-start module 420 in step 720 determines whether predetermined criteria have been met which indicate that synchronization of the workspace elements selected in step 705 should start. If not, then the synchronization-start module 420 in step 15 725 waits and loops back to step 720. Otherwise, the communications module 405 and communications module 505 in step 730 establish a secure communications channel therebetween.

20 The general synchronization module 425 and the general synchronization module 515 in step 735 determine whether any workspace elements have been modified. That is, the general synchronization module 425 in step 740 examines the version information 255 or 150 of each selected workspace element in the workspace data 136 or 116 against the last 25 synchronization signature 435 to locate modified workspace elements. This comparison may include comparing the date of last modification with the date of last synchronization, or may include a comparison between the current status and the previous status as of the last 30 interaction. Similarly, the general synchronization module 515 examines the version information 148 of each corresponding workspace element in workspace data 120 and the last synchronization signature 435 to locate modified workspace elements.

35 If in step 735 no modified workspace elements or folders are located, then the general synchronization modules 425 and 515 in step 760 update the last synchronization signature 435 and method 700 ends. Otherwise, the general synchronization module 425 in step 740 40 determines whether more than one version of a workspace element has been modified since the last synchronization.

45 If only one version has been modified, then the corresponding general synchronization module 425 or 515 in step 745 determines the changes made. As stated above, determining the changes made may be implemented by comparing the current status of the workspace 50 element against the previous status of the workspace element as of the last interaction

5 therebetween. If the changes were made only to the version in the workspace data 120, then  
the global translator 122 in step 750 translates the changes to the format used by the other  
store, and the general synchronization module 515 in step 755 forwards the translated  
10 changes to the general synchronization module 425 for updating the outdated workspace  
element in the workspace data 136 or 116. If the updated version is a workspace element in  
the workspace data 136 or 116, then the general synchronization module 425 sends the  
15 changes to the updated version to the global translator 122 for translation and then to the  
general synchronization module 515 for updating the outdated workspace element in the  
workspace data 120. The general synchronization module 425 and the general  
20 synchronization module 515 in step 757 update the previous state of to reflect the current  
state as of this interaction. Method 700 then returns to step 735.

If the general synchronization module 425 in step 740 determines that multiple  
25 versions have been modified, then the general synchronization module 425 in step 765  
computes the changes to each version and in step 770 instructs the content-based  
synchronization module 430 to examine content to determine if any conflicts exist. For  
30 example, the content-based synchronization module 430 may determine that a conflict exists  
if a user deletes a paragraph in one version and modifies the same paragraph in another  
version. The content-based synchronization module 430 may determine that a conflict does  
35 not exist if a user deletes different paragraphs in each version. If no conflict is found, then  
method 700 jumps to step 750 for translating and forwarding the changes in each version to  
the other store. However, if a conflict is found, then the content-based synchronization  
40 module 430 in step 775 reconciles the modified versions. As stated above, reconciliation may  
include requesting instructions from the user or based on preselected preferences performing  
responsive actions such as storing both versions at both stores. Method 700 then proceeds to  
45 step 750.

It will be appreciated that in step 710 new workspace elements and preexisting  
workspace elements to which new workspace elements will be merged are set to "modified"  
50 and the previous status is set to the null set. Thus, the general synchronization module 425 in

5 step 740 will determine that more than one version has been modified and the content-based  
synchronization module 430 in step 770 will determine that no conflict exists. The changes  
in each will be translated and forwarded to the other store. Accordingly, the two versions will  
10 be effectively merged and stored at each store.

For example, if a first bookmark folder was created by the web browser 152 on the  
desktop computer 134, a second folder was created by a web browser (not shown) on the  
15 remote terminal 102, no preexisting folder existed on the global server 106 and the user  
selected each of these folders for synchronization, then the synchronization means will  
effectively merge the first and second folders. That is, the general synchronization module  
20 425 on the desktop computer 134 will determine that the first folder has been modified and  
the previous status is equal to the null set. The general synchronization module 425 will  
determine and send the changes, i.e., all the workspace elements in the first folder, to a new  
global folder on the global server 106. Similarly, the general synchronization module 425 on  
25 the remote terminal 102 will determine that, as of its last interaction, the previous status of  
each of the second and the global folders is the null set. The general synchronization module  
425 will instruct the content-based synchronization module 430 to examine the changes made  
30 to each folder to determine whether a conflict exists. Since no conflicts will exist, the general  
synchronization module 425 will forward the changes to the global folder and the general  
synchronization module 515 will forward its changes to the second store, thereby merging the  
35 workspace elements of the first and second folders in the global and second folders. The  
general synchronization module 515 will inform the general synchronization module 425 that  
the global folder has been modified relative to the last interaction, and will forward the new  
40 changes to the first folder. Thus, the first and second folders will be merged and stored at  
each store.

For a second example, the user may select an exemplary document in the LAN 110 to  
45 be synchronized. The general synchronization module 425 will forward the document to the  
global server 106. Similarly, the user may select the same document for synchronization on  
the remote terminal 102. The general synchronization module 515 will forward the document  
50

5 to the remote terminal 102. If changes were made to the documents independently, then the  
content-based synchronization module 430 will examine the content of the documents to  
determine if a conflict exists. If no conflict exists, then as described above, the general  
10 synchronization modules 425 and 515 will merge the documents. Otherwise, if a conflict  
does exist, the content-based synchronization module 430 will reconcile the changes and then  
the general synchronization modules 425 and 515 will forward the reconciled changes to each  
15 other.

The foregoing description of the preferred embodiments of the invention is by way of  
20 example only, and other variations of the above-described embodiments and methods are  
provided by the present invention. For example, although the global server 106 is illustrated  
as a single device, the global server 106 may include several computers networked together.  
25 Components of this invention may be implemented using a programmed general purpose  
digital computer, using application specific integrated circuits, or using a network of  
interconnected conventional components and circuits. The embodiments described herein  
30 have been presented for purposes of illustration and are not intended to be exhaustive or  
limiting. Many variations and modifications are possible in light of the foregoing teaching.  
The system is limited only by the following claims.

**Claims**

5

10

15

**This Page Blank (uspto)**

20

25

30

35

40

45

50

55

5        WHAT IS CLAIMED IS:

1.        A system, comprising:
- a first store for storing a first workspace element in a first format;
- 10        a second store for storing a second workspace element which is an independently-modifiable copy of the first workspace element in a second format;
- a communications channel coupling the first store to the second store;
- 15        synchronization means for synchronizing the first workspace element and the second workspace element; and
- a translator for translating between the first format and the second format.
- 20        2.        The system of claim 1, wherein the first format is the same as the second format.
3.        The system of claim 1 wherein the second format includes HTML.
4.        The system of claim 1, wherein the first store is in a LAN.
- 25        5.        The system of claim 1, further comprising a firewall for protecting the first store.
6.        The system of claim 1, further comprising a firewall for protecting the second store.
- 30        7.        The system of claim 1, wherein the synchronization means includes
- a first general synchronization module for examining the first workspace element at the first store to determine whether it has been modified; and
- 35        a second general synchronization module for examining the second workspace element at the second store to determine whether it has been modified.
- 40        8.        The system of claim 7, wherein
- the first workspace element and the second workspace element each include version information; and
- the first and second general synchronization modules each examine the version information of each workspace element to a last synchronization signature to determine
- 45        whether the workspace element was modified.
- 50        9.        The system of claim 1, wherein the synchronization means includes a synchronization-start module for determining when to initiate synchronization.



5           10.    The system of claim 1, wherein the first workspace element includes a first folder and the second workspace element includes a second folder.

10           11.    The system of claim 10, further comprising a content-based synchronization module for examining content of the first workspace element and of the second workspace element when the first workspace element and the second workspace element have both been modified since the last synchronization.

15           12.    The system of claim 11, wherein the content-based synchronization module determines if any conflicts exist, and if so then the content-based synchronization module reconciles the conflicts.

20           13.    The system of claim 11, wherein the content-based synchronization module determines if any conflicts exist, and if not then the content-based synchronization module integrates the changes made to each workspace element.

25           14.    The system of claim 1, further comprising a third store coupled to the second store for storing a third workspace element in a third format.

30           15.    The system of claim 14, wherein the translator translates between the second format and the third format.

            16.    The system of claim 8, wherein the version information indicates the status of each workspace element as of the last synchronization.

35           17.    A method, comprising:  
                accessing a first store storing a first workspace element in a first format;  
                accessing a second store storing a second workspace element which is an  
40               independently-modifiable copy of the first workspace element in a second format;  
                synchronizing the first workspace element and the second workspace element; and  
                translating between the first format and the second format.

45           18.    The method of claim 17, wherein the first format is the same as the second format.

            19.    The method of claim 17, wherein the second format includes HTML.

            20.    The method of claim 17, wherein the first store is in a LAN.

50           21.    The method of claim 17, wherein the first store is protected by a firewall.

- 5           22.    The method of claim 17, wherein the second store is protected by a firewall.
23.    The method of claim 17, further comprising  
                examining the first workspace element to determine whether it has been modified; and  
10               examining the second workspace element to determine whether it has been modified.
24.    The method of claim 23,  
                wherein the first workspace element and the second workspace element each include  
15               version information; and  
                further comprising the step of comparing the version information of each workspace  
                element to a last synchronization signature to determine whether the workspace element was  
20               modified.
25.    The method of claim 17, further comprising the step of determining when to initiate  
                synchronization.
26.    The method of claim 17, wherein the first workspace element includes a first folder  
25               and the second workspace element includes a second folder.
27.    The method of claim 26, further comprising the step of examining content of the first  
                workspace element and of the second workspace element when the first workspace element  
30               and the second workspace element have both been modified since the last synchronization.
28.    The method of claim 27, further comprising the step of determining if any conflicts  
                exist, and if so then reconciling the conflicts.
29.    The method of claim 27, further comprising the step of determining if any conflicts  
35               exist, and if not then integrating the changes made to each workspace element.
30.    The method of claim 17, further comprising the step of accessing a third store  
40               coupled to the second store storing a third workspace element in a third format.
31.    The method of claim 30, wherein further comprising the step of translating between  
                the second format and the third format.
32.    The method of claim 24, wherein the version information indicates the status of each  
45               workspace element as of the last synchronization.
33.    A system, comprising:
- 50

5 means for accessing a first store storing a first workspace element in a first format;  
means for accessing a second store storing a second workspace element which is an  
independently-modifiable copy of the first workspace element in a second format;  
10 means for synchronizing the first workspace element and the second workspace  
element; and  
means for translating between the first format and the second format.

15 34. A computer-readable storage medium storing program code for causing a computer to  
perform the steps of:

accessing a first store storing a first workspace element in a first format;  
20 accessing a second store storing a second workspace element which is an  
5 independently-modifiable copy of the first workspace element in a second format;  
synchronizing the first workspace element and the second workspace element; and  
25 translating between the first format and the second format.

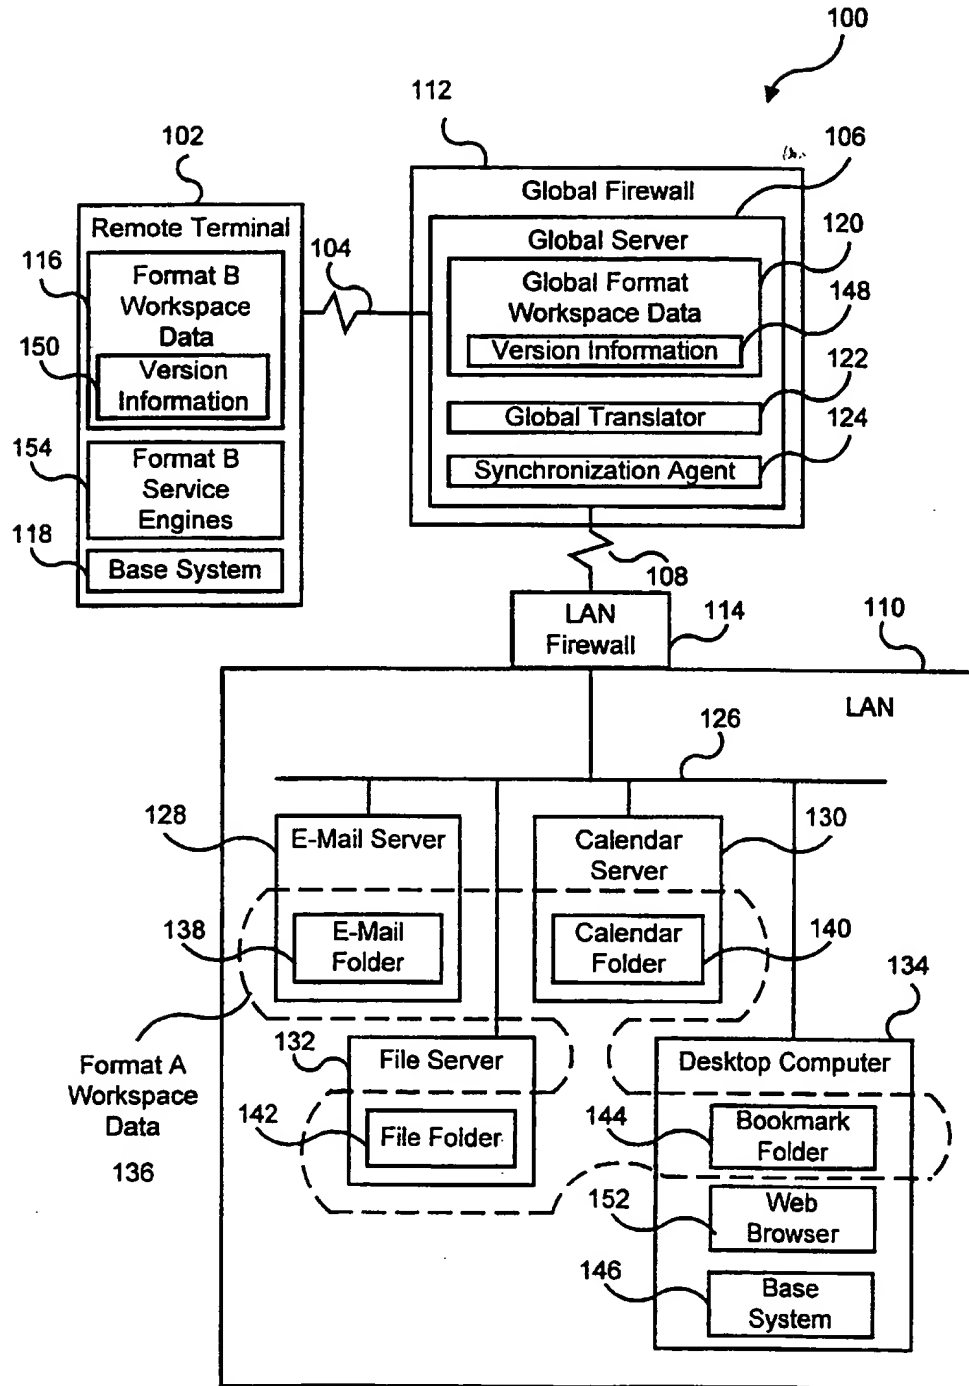


FIG. 1

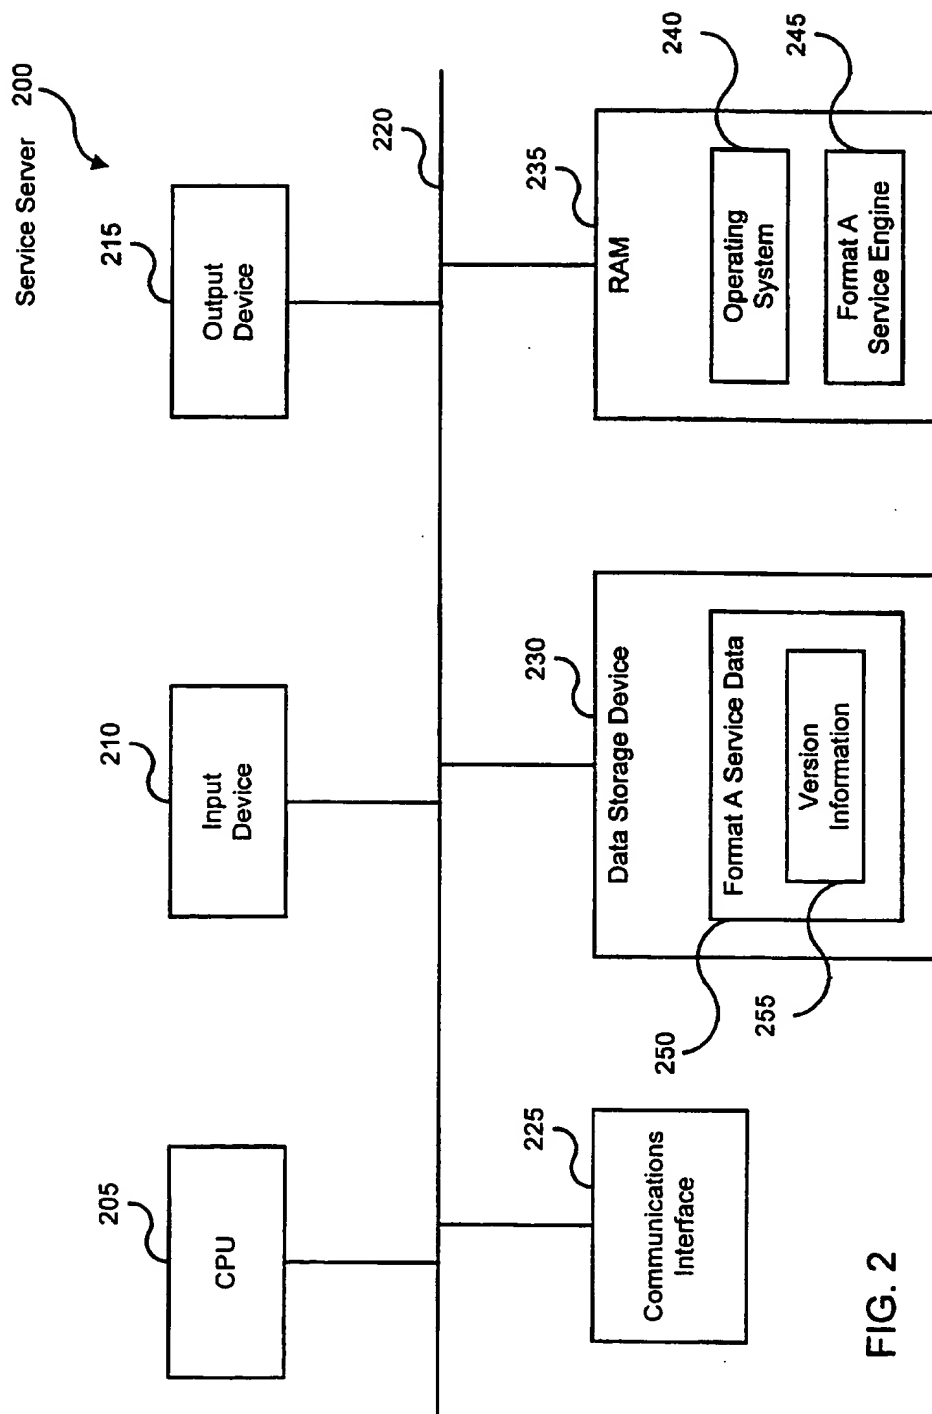


FIG. 2

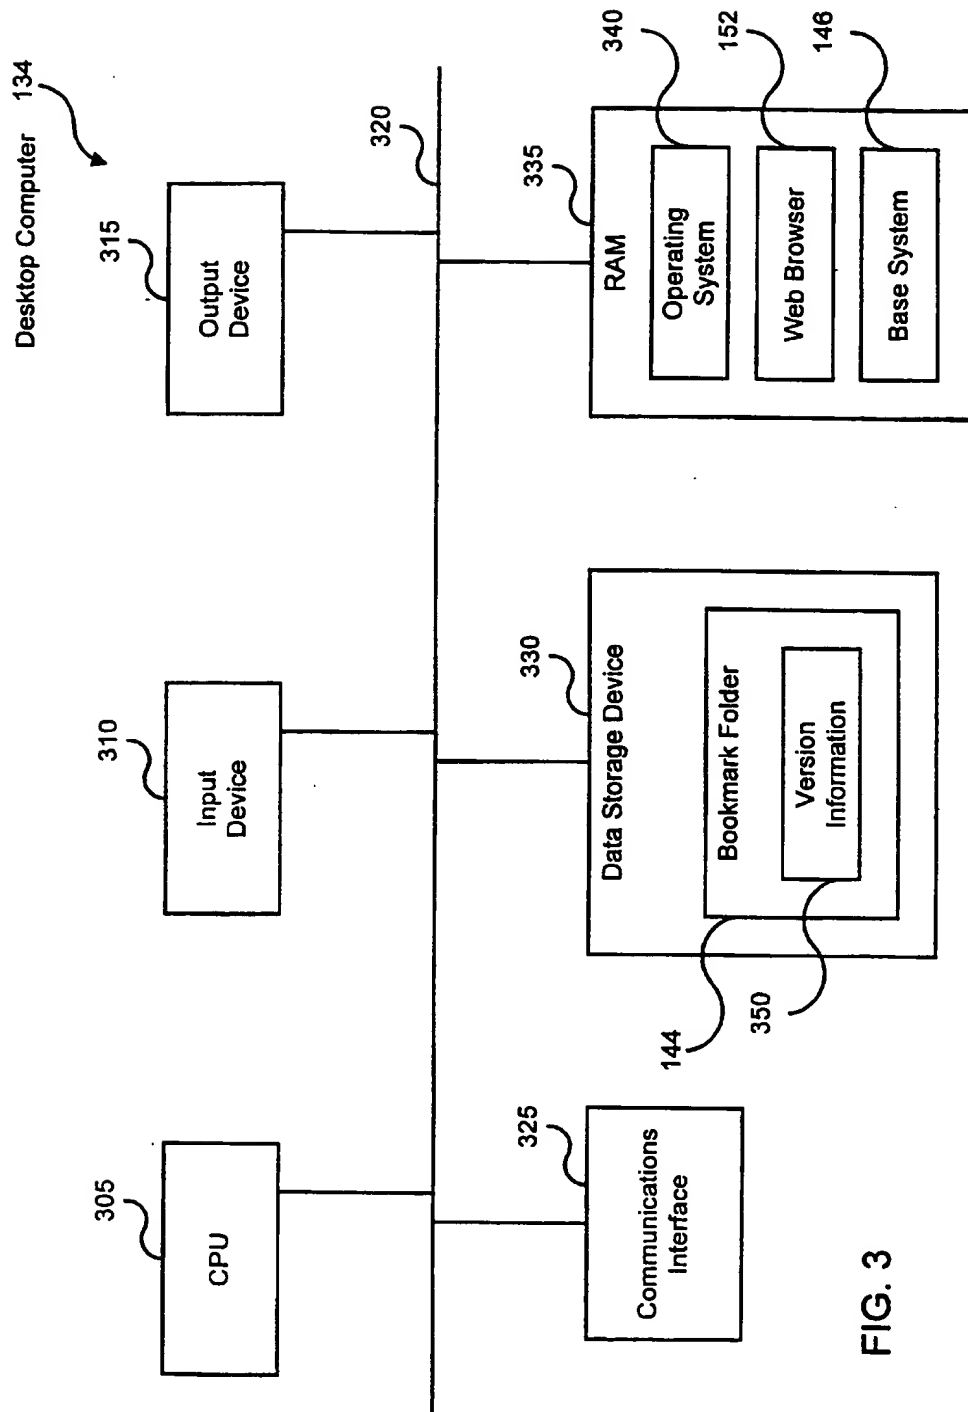


FIG. 3

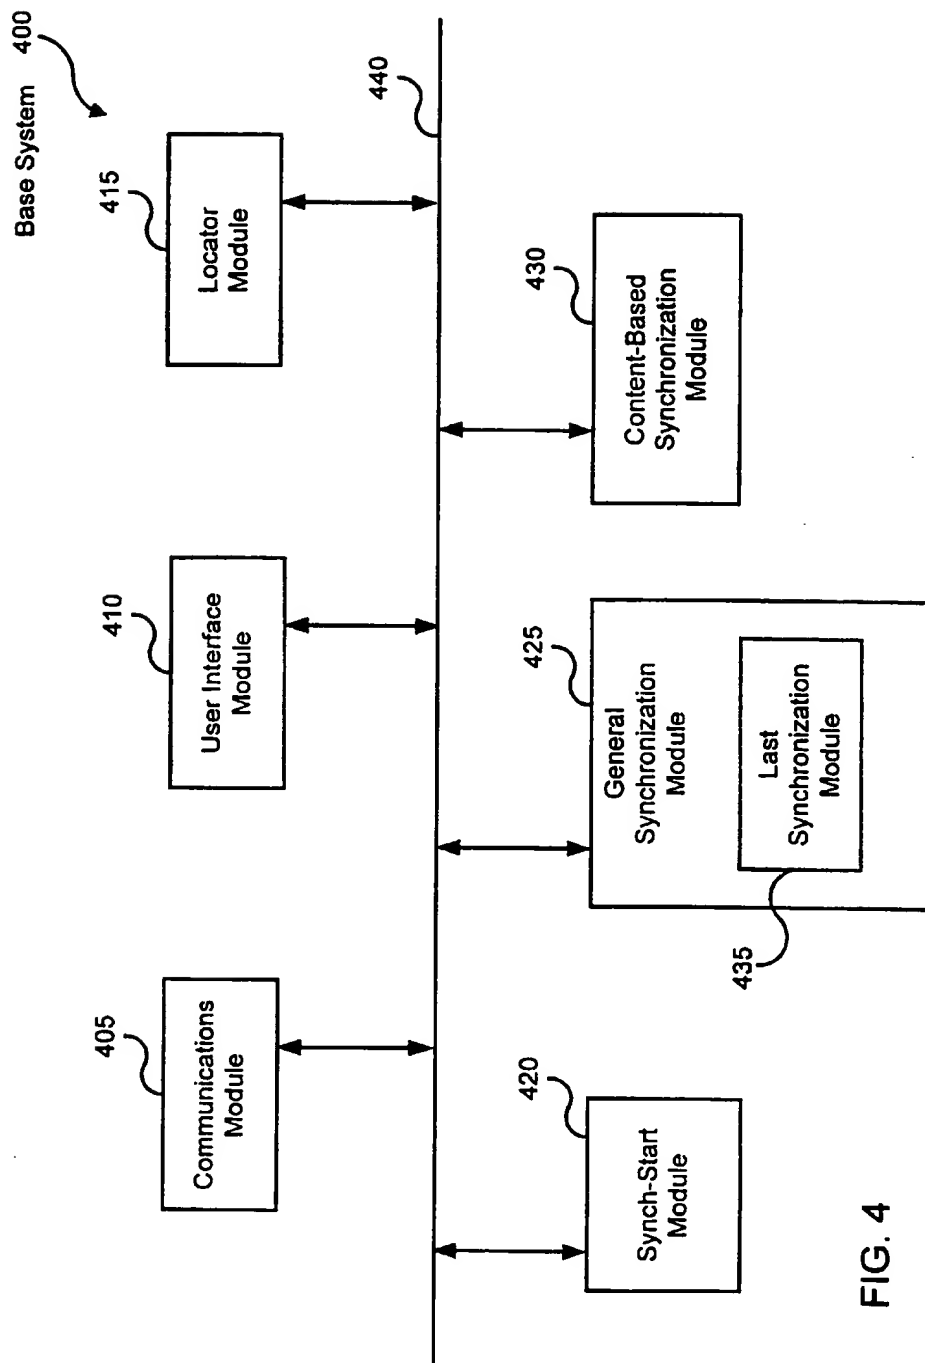


FIG. 4

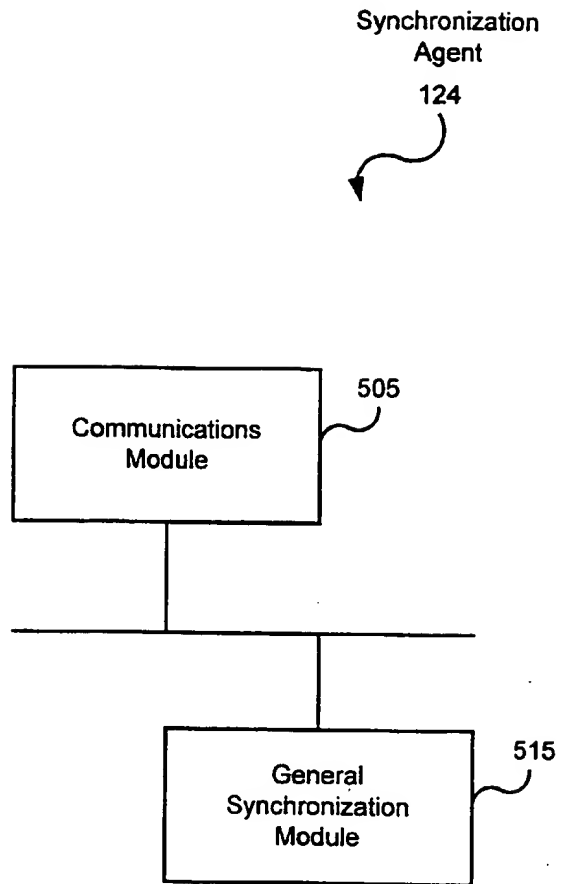


FIG. 5



User ID	605
Entry ID	610
Parent ID	615
Is Folder?	620
Name	625
Description	630
URL	635
Position	640
Is Deleted	645
Last Modified Date	650
Created Date	655
Separation After?	660

**FIG. 6**  
(Global Format Bookmark  
Example)

7 / 7

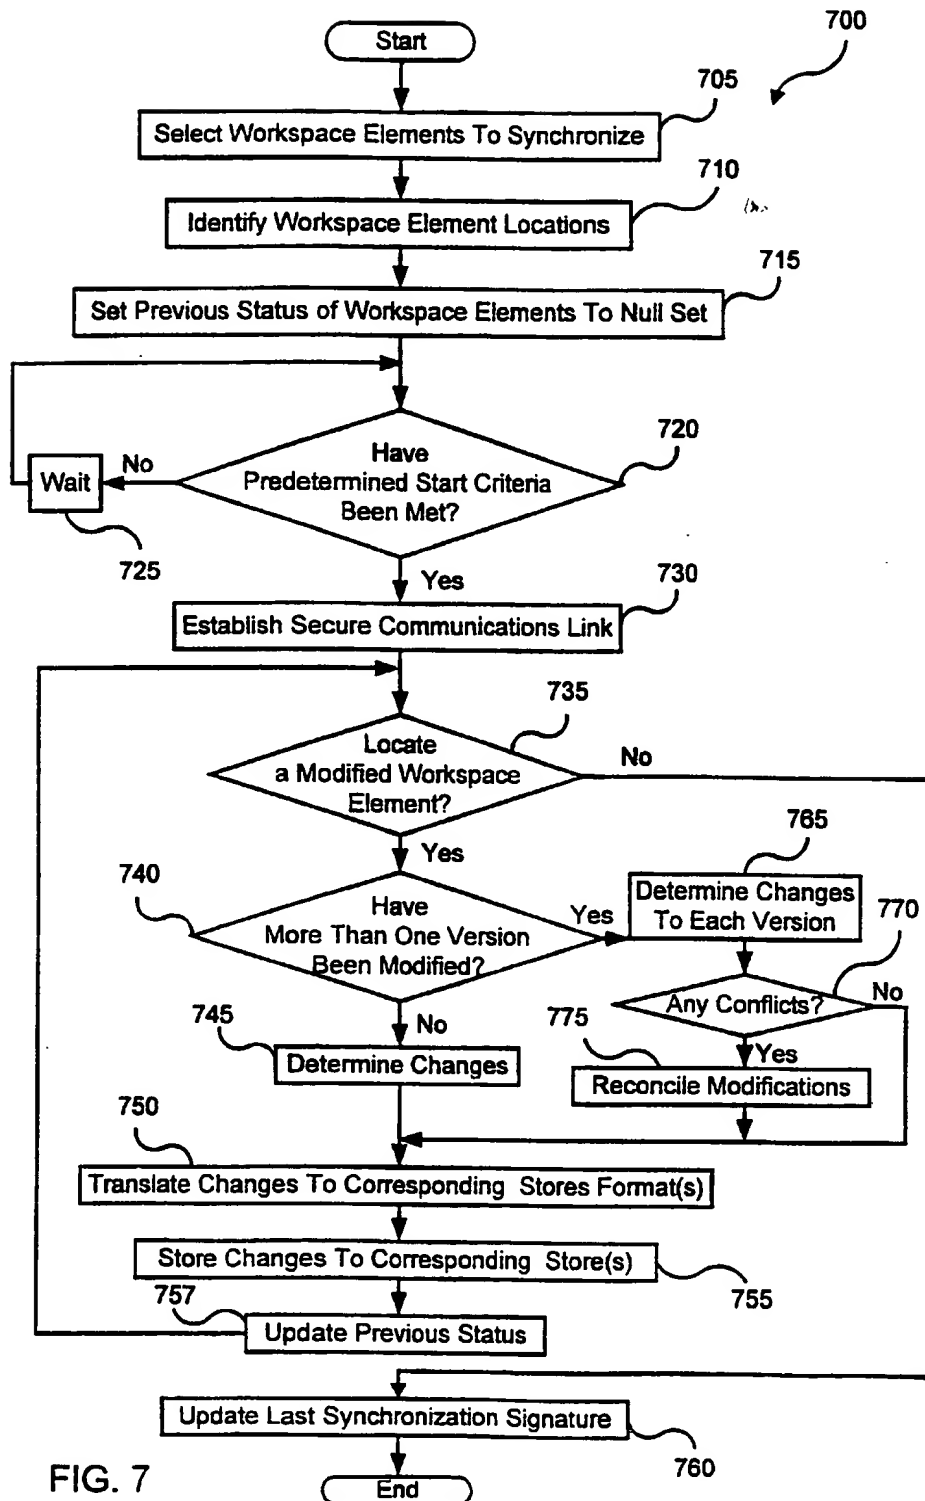


FIG. 7

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/17365

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G06F 17/00

US CL : 395/200.31

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 395/200.31, 200.78; 705/16, 21

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,745,360 A (LEONE ET AL.) 28 APRIL 1998, COLS 1-12.	1-34
Y	US 5,721,914 A (DEVRIES) 24 FEBRUARY 1998, COLS. 1-10.	1-34
Y	US 5,386,564 A (SHEARER ET AL.) 31 JANUARY 1995, COLS. 1-25.	1-34
Y	ENZO MARINACCI BOOKMARK TRANSLATOR 2.0 WWW.BNS.IT/EMWARE/BOOKMARKTRANSLATOR~UK.HTM JULY 1997, PAGES 1-4, SEE ENTIRE DOCUMENT.	1-34

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents.	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* documents published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

25 SEPTEMBER 1998

Date of mailing of the international search report

03 NOV 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Ellis B. Ramirez

Telephone No. (703) 305-9784